


RENEWCELL

Feedstock specification

Ortviken Recycling Plant

Version	Date	Changes	Page
0.9	2020-02-05	First issue (WIP)	
0.95	2020-12-03		
0.97	2021-08-27	Bale requirement	
0.98	2022-02-02	Some prints accepted	
1.0	2022-03-29	Additions regarding colours and prints	
1.1	2022-06-03	Removed pigment print	

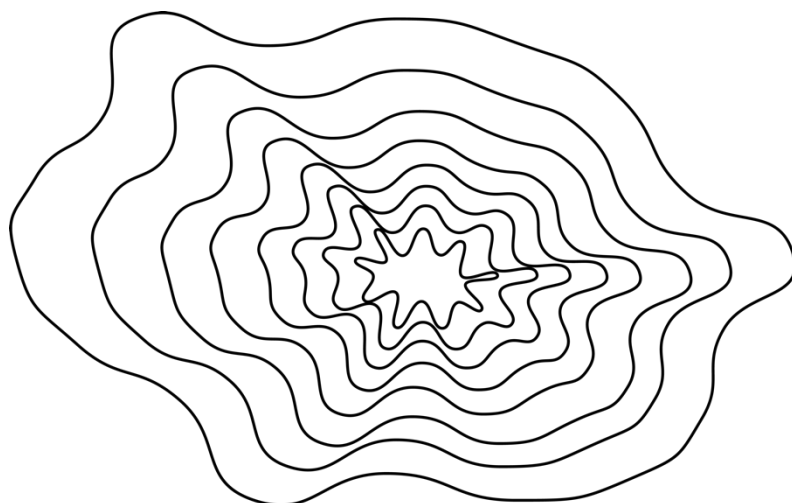

Textile waste specification

- The cotton content of the recyclable textile waste must be above ninety-five (95) per cent, measured by weight according to ISO 1833-11:2017, EU Regulation No 1007/2011 or similar international standards.
- Full garments including trims and seams are OK.
- All types of dyes and colours are OK.
- The recyclable textile waste shall not have plastic prints on them. Prints using reactive dye are accepted.
- The recyclable textile waste shall not have been treated with permanent press finishing or water-resistant finishing.
- The recyclable textile waste shall be packed as bales; ~500kg per bale.
- The material covering the bale shall be textile and follow the same quality specification as the recyclable textile waste.
- Bales shall be tied with denim/sizing yarn as preferred option and metal wire as second option. Bales shall not be cross wrapped.
- Moisture content in the bales shall be below 8% by weight.
- Textile waste shall not contain restricted chemicals above the Reporting Limit threshold in the Restricted Substances List published by the Affirm Group (<https://www.afirm-group.com/afirm-rsl/>).

Contact
Renewcell Sourcing
sourcing@renewcell.com