


RENEWCELL

Feedstock specification

Ortviken Recycling Plant
August 2021

| Version | Date | Changes | Page |
|---------|------------|-------------------|------|
| 0.9 | 2020-02-05 | First issue (WIP) | |
| 0.95 | 2020-12-03 | | |
| 0.97 | 2021-08-27 | Bale requirement | |

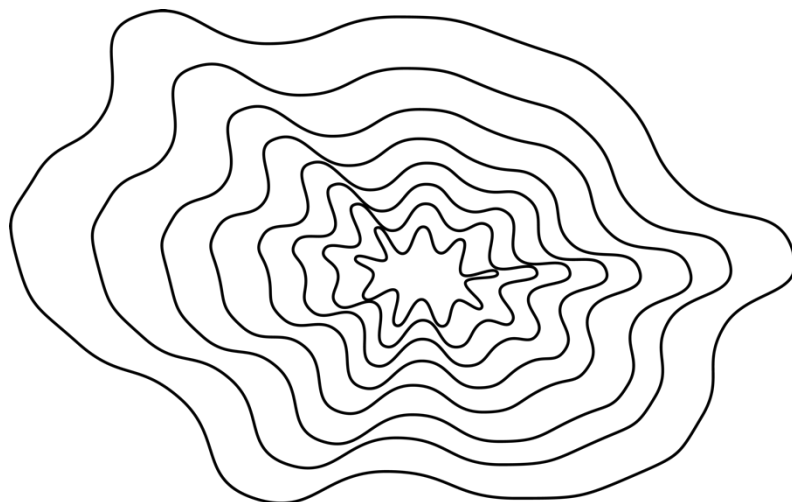

Re:NewCell AB (publ)
Reg. No. 556885-6206
sourcing@renewcell.com

Cardellgatan 1
114 36 Stockholm
Sweden

Textile waste specification

- The cotton content of the Recyclable Waste must be above ninety five (95) per cent, measured by weight according to ISO 1833-11:2017 or similar international standards.
 - Initially under start up of the plant the requirement cotton content will be higher.
- Full garments including trims and seams are OK.
- The Recyclable Waste shall not have prints on them. The Recyclable Waste shall not have been treated with permanent press finishing or water resistant finishing.
- The recyclable waste shall be packed as bales – not exceeding 500kg per bale.
- The material covering the bale shall be textile and follow the same Quality Specification as the Recyclable Waste.
- Bales shall be tied with preferably denim yarn but metal wire can also be used .Bales shall not be cross wrapped.
- Moisture content in the bales shall be below 8% by weight.
- Textile waste shall not contain restricted chemicals above the Reporting Limit threshold in the Restricted Substances List published by the Affirm Group (<https://www.afirm-group.com/afirm-rsl/>).

Contact
Renewcell Sourcing
sourcing@renewcell.com